



FMA・WA



マルチボアツールリングシステム フェイスミルアーバヘッド

Face Mill Arbor Head



Type1

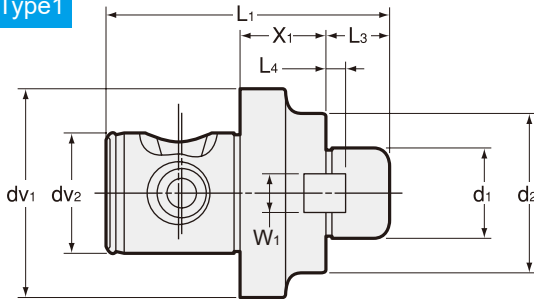

Type2

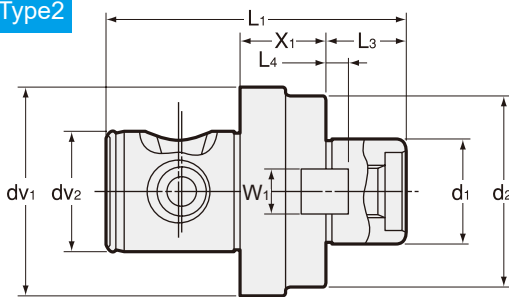

Type3

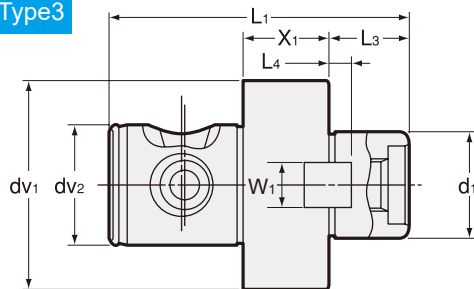

商品コード Code	型式 Model	Type	d1	dv1	dv2	X1	d2	L1	L3	L4	W1	C4	H3	kg	—	締め付け ボルト Clamping bolt	参考カット径 Cutting dia. Example JIS B4113-1970
5080 74102563	FMA 25.4WA -6336	1	25.4	63	36	25	50	87	22	5	9.5	33	10	1.0	10,000	MBA-M12	80
5080 74103163	31.75WA -6336	2	31.75	63	36	25	60	95	30	7	12.7	40	10	1.2	10,000	MBA-M16	100
5080 74102580	25.4WA -8036	1	25.4	80	36	25	50	87	22	5	9.5	33	10	1.2	11,000	MBA-M12	80
5080 74103180	31.75WA -8036	2	31.75	80	36	25	60	95	30	7	12.7	40	10	1.3	11,000	MBA-M16	100
5080 74103880	38.1WA -8036	3	38.1	80	36	25	—	99	34	9	15.9	50	14	1.8	11,000	MBA-M20	125




締付ボルトは付属しています。

Clamp bolt is Included.

マスターシャク Master shank
BTP. 178 AHO.....P. 252
HSK.....P. 318 C.....P. 352

リダクション
Reduction
P. 176

エクステンション
Extension
P. 177



ご注文例 Ordering Example

FMA25.4WA - 63 36

カッター取付部インローサイズ
Pilot dia. for cutter

ジョイント部インローサイズ
Centering location size

突出し部
Projection length